

# ASPEN Square Top Summit Gully

Load Class up to FACTA C250



Stainless

ASPEN Stainless hardworking stainless steel products for hardwearing environments:  
British engineered with a lifetime guarantee.

## Product Description

The Standard Summit Gully is a general purpose Gully designed for use in most areas, which is bead blasted with easy access for Rodding.


Suitable for hygienic environments accessed by medium load factory traffic.

The Summit Gully is available in two sizes to accommodate different flow rates.

## Technical Specification

- > Stainless steel of various thicknesses.
- > 50mm water trap.
- > Square opening with smooth cover.
- > Grade 304 stainless steel (British Standard 304S31, Euronorm 1.4301).

MODEL	REF	GULLY DIMENSIONS							FLOW RATES	FACTA LOAD CLASS
		A	B	C	D	E	Fø	G		
SUMMIT 110	SGS110	270	200	235	110	295	NA	218	3.0 Ltr/Sec	
SUMMIT & CON 110	SGS110C	270	200	235	110	295	38/42/50	218	3.0 Ltr/Sec	
SUMMIT 160	SGS160	317	250	280	160	368	NA	265	6.0 - 7.0 Ltr/Sec	

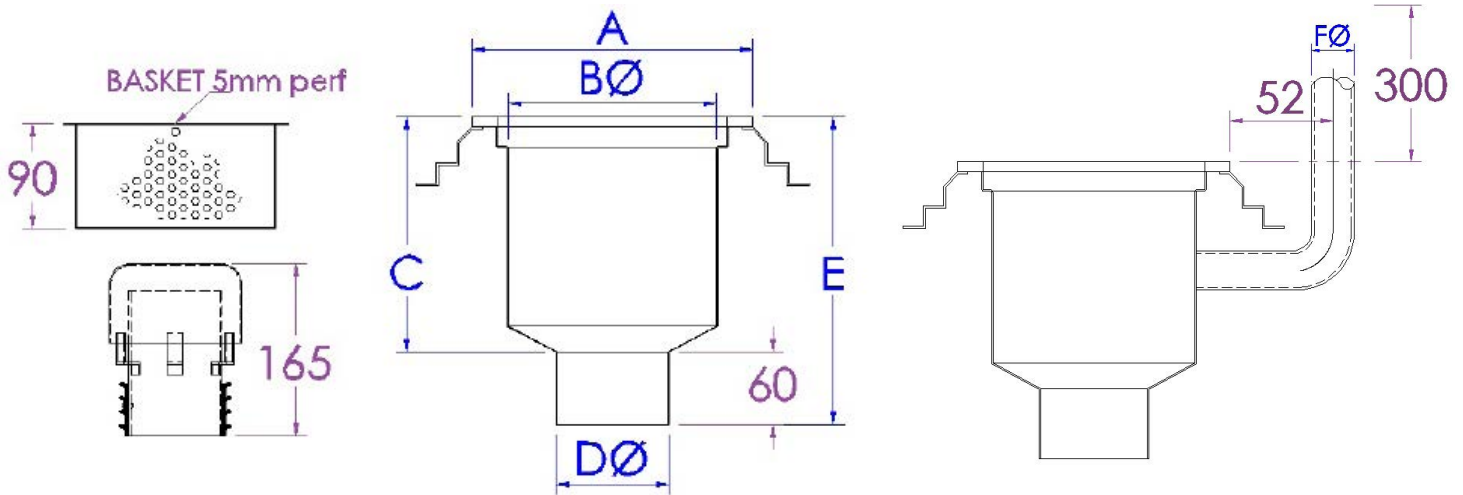

The blue measurements indicate the variable dimensions shown in the chart above. All dimensions in mm.



# ASPEN Square Top Summit Gully

Load Class up to FACTA C250



ASPEN Stainless hardworking stainless steel products for hardwearing environments: British engineered with a lifetime guarantee.

## ASPEN Drainage System

As the UK based designer and manufacturer of all ASPEN Stainless, Canal Engineering is able to offer a full range of products to complete your drainage system and can customize any of its Units or manufacture complete bespoke drainage systems.

### Key Benefits


The Summit Gully is manufactured with a drainable 50mm water trap and removable trash basket.

### Maintenance

Stainless steel equipment should be occasionally thoroughly checked for retained deposits and concentrated fluid build up that causes corrosion.

### Cleaning

Many factors affect the choice of cleaning method and frequency of its application. Suitable methods for stainless steel are: water and steam; mechanical non abrasive scrubbing; organic solvents and mild detergents.

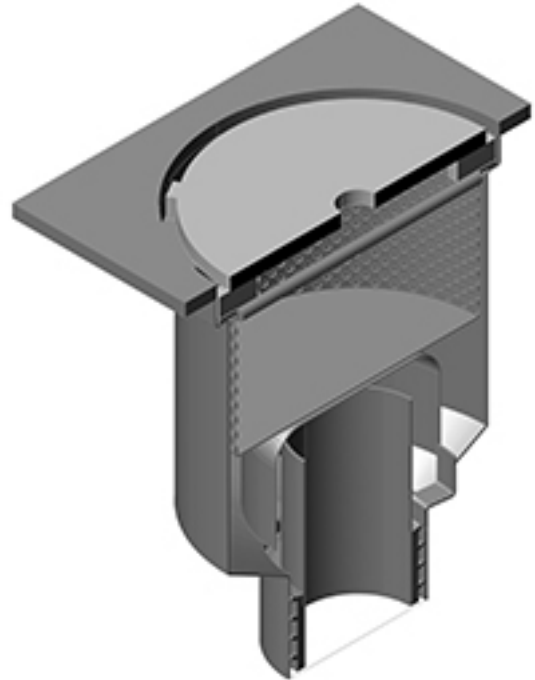

Square Top Summit Gully Sample

## ASPEN Drainage Installation

Canal Engineering offer supply only or full installation, with fully welded and polished joints, and commissioning. Canal Engineering also offer on-going annual inspection and maintenance contracts.

For advice regarding the most suitable ASPEN Stainless for you please contact our technical sales team today to discuss your requirements.

## ASPEN Drainage Options

- > Available in grade 316 stainless steel (British Standard 316S31, Euronorm 1.4401).
- > A range of Gully Covers (see TD35).
- > Gully Membrane Flange (see TD66).
- > Gully Basket.
- > Condense.
- > Locking Gully Cover.
- > Gully Cover lifting tools.
- > Variable filtration mesh hole size.