

ASPEN Summit Central Side Drain Outlet

Load Class up to FACTA C250



ASPEN Stainless hardworking stainless steel products for hardwearing environments:
British engineered with a lifetime guarantee.




Product Description

The Summit Central Drain Outlet with a side outlet pipe can be positioned along the length of a drain channel section, and has a removable mushroom trap.
Suitable for hygienic environments accessed by all types of factory traffic.
The Summit Drain Outlet is available in 4 sizes to accommodate different flow rates.

Technical Specification

- > 2mm stainless steel water trap (50mm).
- > 1 x stainless steel removable trash basket.
- > Outlet Drain Cover will dictate the load class up to C250 FACTA Loading.
- > Grade 304 stainless steel (British Standard 304S31, Euronorm 1.4301).
- > Compliant with EHEDG guidelines

MODEL	REF	OUTLET DIMENSIONS							FLOW RATES	FACTA LOAD CLASS
		A	B	C	D	E	F	G		
100 CHANNEL 110Ø OUTLET	OSCS100110	100	110	294 MIN	350	203	383 MIN	300	3 Ltr/Sec	
100 CHANNEL 160Ø OUTLET	OSCS100160	100	160	342 MIN	400	253	408 MIN	350	6 - 7 Ltr/Sec	
170 CHANNEL 110Ø OUTLET	OSCS170110	170	110	294 MIN	300	203	383 MIN	300	3 Ltr/Sec	
170 CHANNEL 160Ø OUTLET	OSCS170160	170	160	342 MIN	400	253	408 MIN	350	6 - 7 Ltr/Sec	

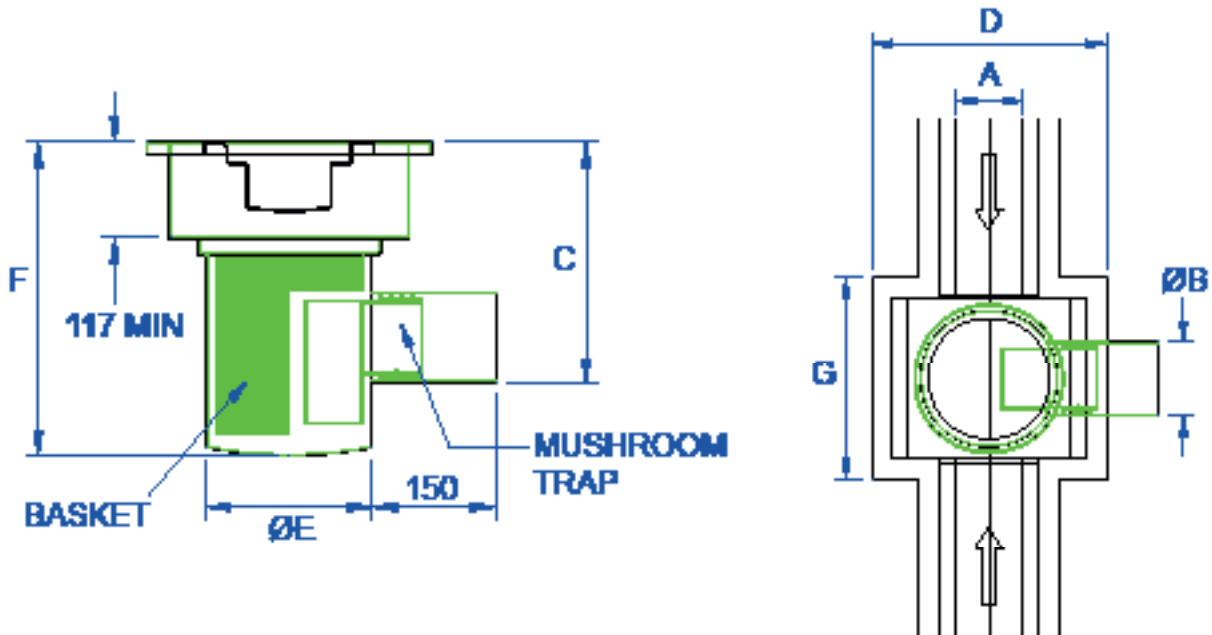

All dimensions in mm.



ASPEN Summit Central Side Drain Outlet

Load Class up to FACTA C250



ASPEN Stainless hardworking stainless steel products for hardwearing environments: British engineered with a lifetime guarantee.

ASPEN Drainage System

As the UK based designer and manufacturer of all ASPEN Stainless, Canal Engineering is able to offer a full range of products to complete your drainage system and can customize any of its Units or manufacture complete bespoke drainage systems.

Maintenance

Stainless steel equipment should be occasionally thoroughly checked for retained deposits and concentrated fluid build up that causes corrosion.

Cleaning

Many factors affect the choice of cleaning method and frequency of its application. Suitable methods for stainless steel are: water and steam; mechanical non abrasive scrubbing; organic solvents and mild detergents.

ASPEN Drainage Installation

Canal Engineering offer supply only or full installation, with fully welded and polished joints, and commissioning. Canal Engineering also offer on-going annual inspection and maintenance contracts.

For advice regarding the most suitable ASPEN Stainless for you please contact our technical sales team today to discuss your requirements.

ASPEN Drainage Options

- > Available in grade 316 stainless steel (British Standard 316S31, Euronorm 1.4401).
- > Variable filtration mesh hole size.



Summit End Side Drain Outlet Sample