

ASPEN Summit Central Bottom Drain Outlet

Load Class up to FACTA C250



Stainless

ASPEN Stainless hardworking stainless steel products for hardwearing environments:
British engineered with a lifetime guarantee.




Product Description

The Summit Central Drain Outlet with a bottom outlet pipe can be positioned along the length of a drain channel section, and has a removable mushroom trap.
Suitable for hygienic environments accessed by all types of factory traffic.
The Summit Drain Outlet is available in 4 sizes to accommodate different flow rates.

Technical Specification

- > 2mm stainless steel water trap (50mm).
- > 1 x stainless steel removable trash basket.
- > Outlet Drain Cover will dictate the load class up to C250 FACTA Loading.
- > Grade 304 stainless steel (British Standard 304S31, Euronorm 1.4301).
- > Compliant with EHEDG guidelines

MODEL	REF	OUTLET DIMENSIONS					FLOW RATES	FACTA LOAD CLASS
		A	B	C	D	G		
100 CHANNEL 110Ø OUTLET	OSCB100110	100	110	404 MIN	350	300	3 Ltr/Sec	
100 CHANNEL 160Ø OUTLET	OSCB100160	100	160	477 MIN	400	350	6 - 7 Ltr/Sec	
170 CHANNEL 110Ø OUTLET	OSCB170110	170	110	404 MIN	300	300	3 Ltr/Sec	
170 CHANNEL 160Ø OUTLET	OSCB170160	170	160	477 MIN	400	350	6 - 7 Ltr/Sec	

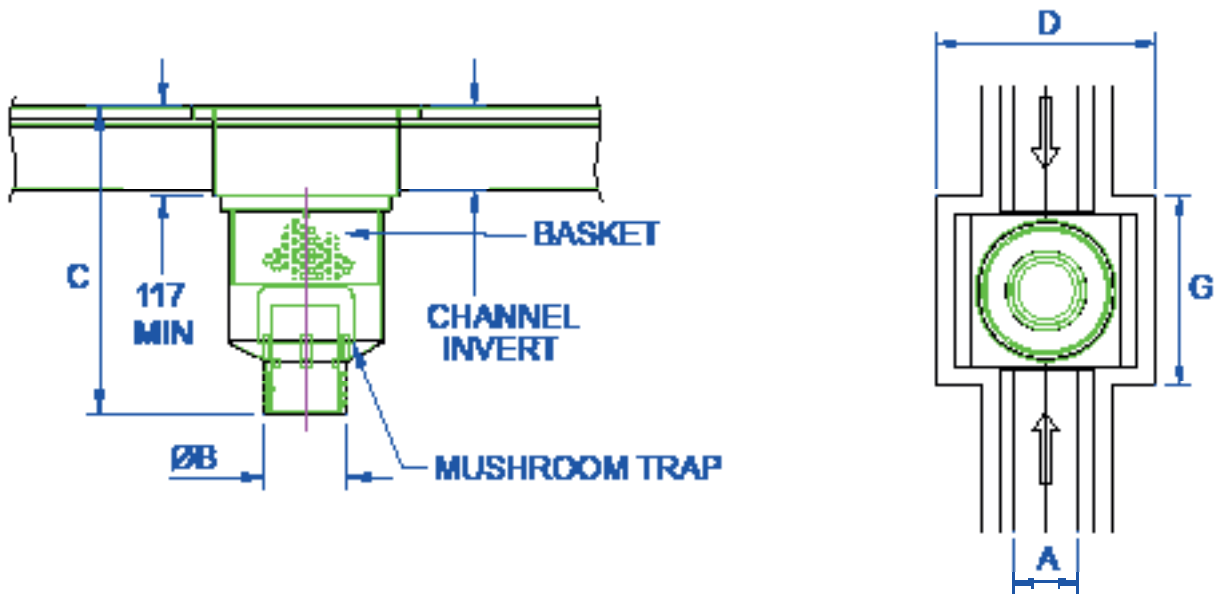

All dimensions in mm.



+44 (0) 115 986 6321
 aspen@canalengineering.co.uk
 www.aspen.eu.com

ASPEN Summit Central Bottom Drain Outlet

Load Class up to FACTA C250



ASPEN Stainless hardworking stainless steel products for hardwearing environments: British engineered with a lifetime guarantee.

ASPEN Drainage System

As the UK based designer and manufacturer of all ASPEN Stainless, Canal Engineering is able to offer a full range of products to complete your drainage system and can customize any of its Units or manufacture complete bespoke drainage systems.

Maintenance

Stainless steel equipment should be occasionally thoroughly checked for retained deposits and concentrated fluid build up that causes corrosion.

Cleaning

Many factors affect the choice of cleaning method and frequency of its application. Suitable methods for stainless steel are: water and steam; mechanical non abrasive scrubbing; organic solvents and mild detergents.

ASPEN Drainage Installation

Canal Engineering offer supply only or full installation, with fully welded and polished joints, and commissioning. Canal Engineering also offer on-going annual inspection and maintenance contracts.

For advice regarding the most suitable ASPEN Stainless for you please contact our technical sales team today to discuss your requirements.

ASPEN Drainage Options

- > Available in grade 316 stainless steel (British Standard 316S31, Euronorm 1.4401).
- > Variable filtration mesh hole size.



Summit End Side Drain Outlet Sample