

ASPEN Square Top Side Outlet Tiehack Gully

Load Class up to FACTA C250



ASPEN Stainless hardworking stainless steel products for hardwearing environments:
British engineered with a lifetime guarantee.




Product Description

The Standard Side Outlet Tiehack Gully is bead blasted with easy access for Rodding.
Suitable for hygienic environments accessed by medium load factory traffic.
The Side Outlet Tiehack Gully is available in two sizes to accommodate different flow rates.

Technical Specification

- > Body: made from 1.2mm stainless steel.
- > Top: made from 10mm stainless steel.
- > Square top Gully with smooth cover.
- > 50mm water trap.
- > Trash basket with 6mm holes.
- > Grade 304 stainless steel (British Standard 304S31, Euronorm 1.4301).
- > EHEDG can be achieved with alterations

MODEL	REF	GULLY DIMENSIONS				FLOW RATES	FACTA LOAD CLASS
		A	B	C	D		
SIDE 110	TGSOS110	310	281	210	110	4.0 - 5.0 Ltr/Sec	
SIDE 160	TGSOS160	310	281	210	160	7.0 - 8.0 Ltr/Sec	

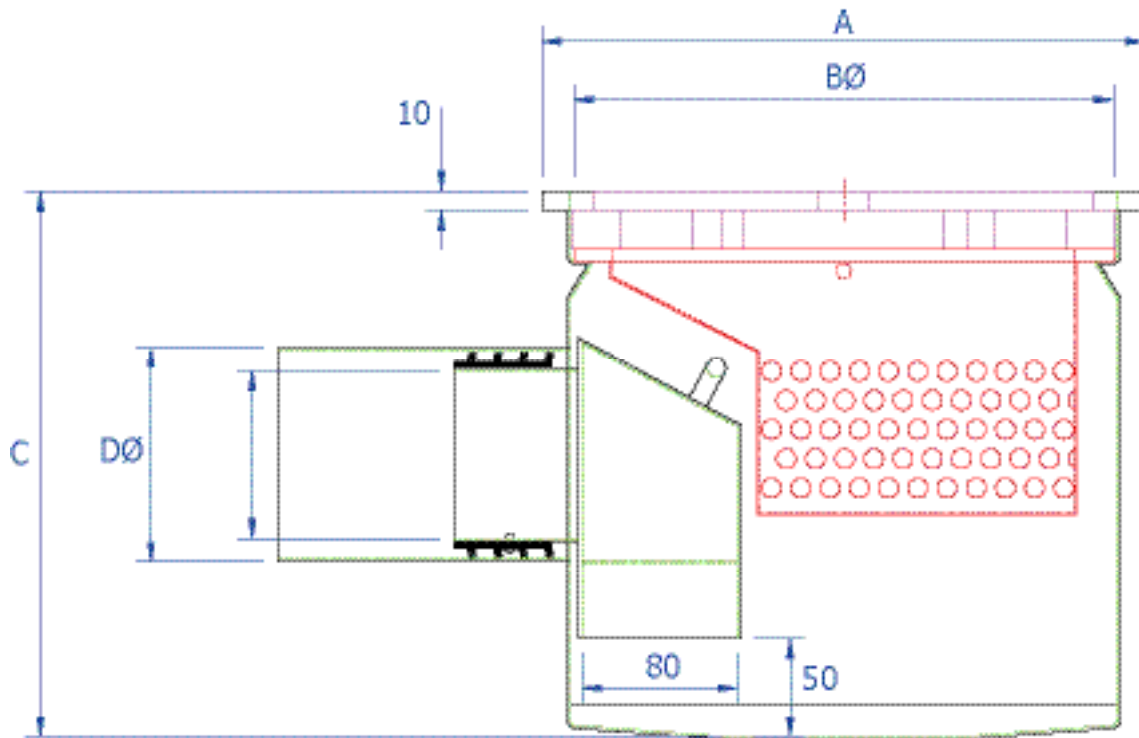

All dimensions in mm.



ASPEN Square Top Side Outlet Tiehack Gully

Load Class up to FACTA C250



ASPEN Stainless hardworking stainless steel products for hardwearing environments: British engineered with a lifetime guarantee.

ASPEN Drainage System

As the UK based designer and manufacturer of all ASPEN Stainless, Canal Engineering is able to offer a full range of products to complete your drainage system and can customize any of its Units or manufacture complete bespoke drainage systems.

Key Benefits

A versatile and popular gully for use in any area utilising a solid and well established design to provide maximum drainage and good filtration of solids.

The side outlet provides a simple connection in low invert environments.

Maintenance

Stainless steel equipment should be occasionally thoroughly checked for retained deposits and concentrated fluid build up that causes corrosion.


Cleaning

Many factors affect the choice of cleaning method and frequency of its application. Suitable methods for stainless steel are: water and steam; mechanical non abrasive scrubbing; organic solvents and mild detergents.

ASPEN Drainage Installation

Canal Engineering offer supply only or full installation, with fully welded and polished joints, and commissioning. Canal Engineering also offer on-going annual inspection and maintenance contracts.


For advice regarding the most suitable ASPEN Stainless for you please contact our technical sales team today to discuss your requirements.

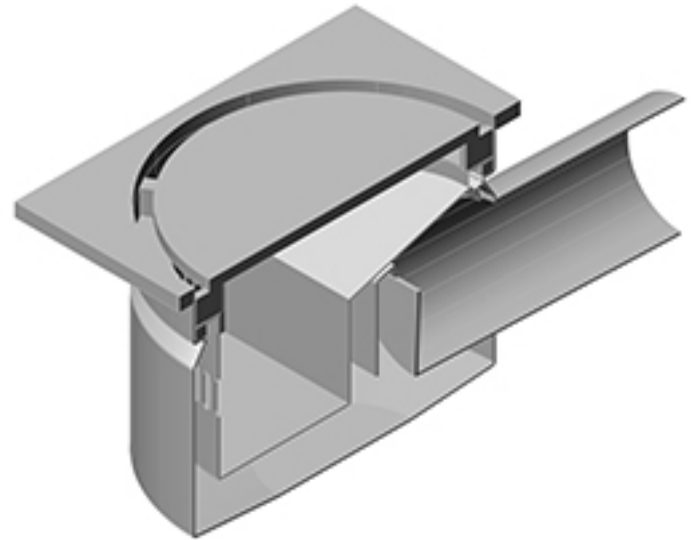

Square Top Side Outlet Tiehack Gully Sample

ASPEN Drainage Options

- > Available in grade 316 stainless steel (British Standard 316S31, Euronorm 1.4401).
- > A range of Gully Covers (see TD35).
- > Locking Gully Cover.
- > Gully Membrane Flange Disc (see TD66).
- > Gully Cover lifting tools.
- > Variable filtration mesh hole size.
- > Condense Pipe.
- > Anti Backflow Mushroom Gully Trap (see below).

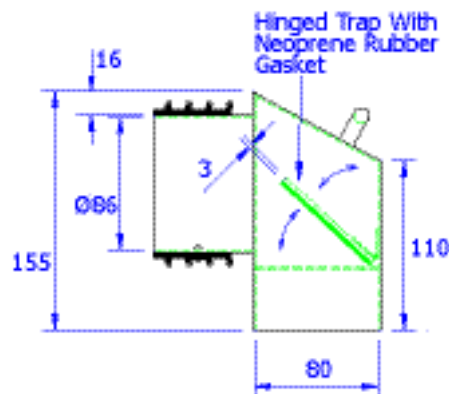

Anti Backflow Mushroom Gully Trap Drawing.