

ASPEN Side Outlet Vail Gully | Square Top Only

Load Class up to FACTA C250



ASPEN Stainless hardworking stainless steel products for hardwearing environments:
British engineered with a lifetime guarantee.



Product Description

The Standard Side Outlet Vail Gully is a large format Gully ideal for areas of high flow rates and where invert levels are close to the surface. The Gully is bead blasted with easy access for Rodding.

Suitable for hygienic environments accessed by medium load factory traffic.


The Side Outlet Vail Gully is available in two sizes to accommodate different flow rates.

Technical Specification


- > Stainless steel of various thicknesses.
- > 50mm water trap.
- > Square opening with 4 bar drain cover.
- > Trash basket with 6mm holes.
- > Grade 304 stainless steel (British Standard 304S31, Euronorm 1.4301).
- > EHEDG can be achieved with alterations

MODEL	REF	GULLY DIMENSIONS					FLOW RATES	FACTA LOAD CLASS
		A	B	C	D	E		
VAIL 110	VGSO110	350	240	300	110	190	5.0 Ltr/Sec	
VAIL 160	VGSO160	350	240	386	160	258	10.0 Ltr/Sec	

SIDE VIEW

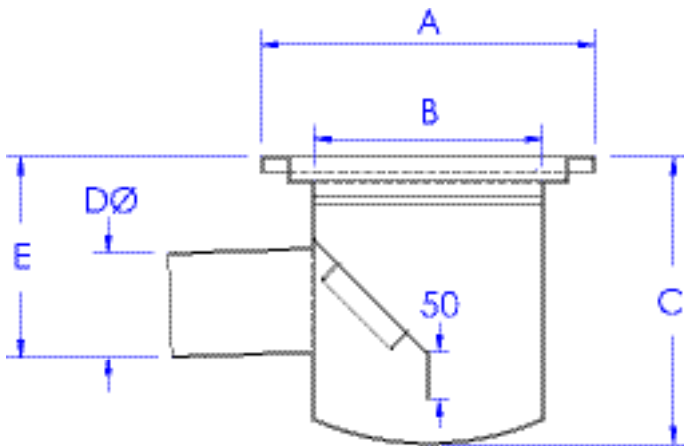

EXPANDED VIEW

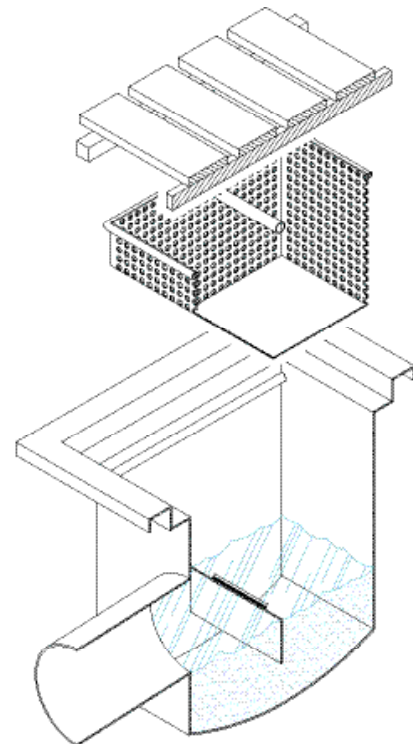

All dimensions in mm.



ASPEN Side Outlet Vail Gully | Square Top Only

Load Class up to facta C250



ASPEN Stainless hardworking stainless steel products for hardwearing environments: British engineered with a lifetime guarantee.

ASPEN Drainage System

As the UK based designer and manufacturer of all ASPEN Stainless, Canal Engineering is able to offer a full range of products to complete your drainage system and can customize any of its Units or manufacture complete bespoke drainage systems.

Key Benefits


The Gully is manufactured for use in areas of high flow rates with a minimum 50mm water trap and trash basket. Trash basket can be resized to suit.

Maintenance

Stainless steel equipment should be occasionally thoroughly checked for retained deposits and concentrated fluid build up that causes corrosion.

Cleaning

Many factors affect the choice of cleaning method and frequency of its application. Suitable methods for stainless steel are: water and steam; mechanical non abrasive scrubbing; organic solvents and mild detergents.

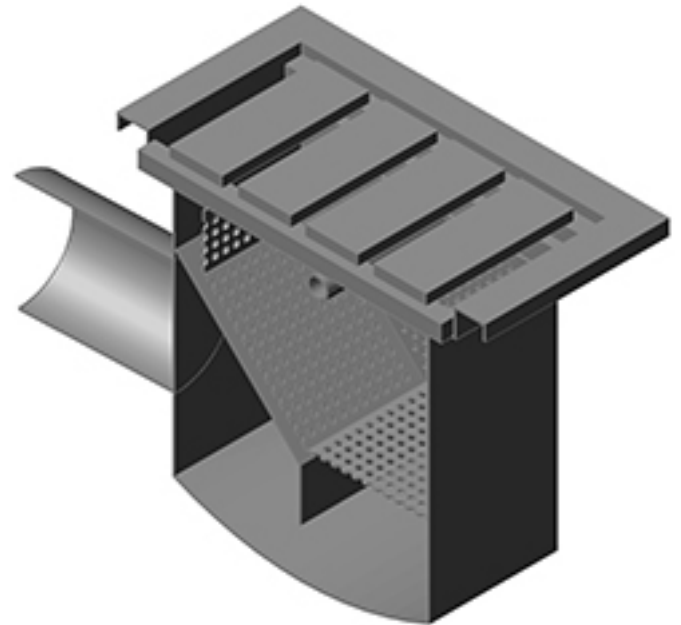

Side Outlet Vail Gully Sample


ASPEN Drainage Installation

Canal Engineering offer supply only or full installation, with fully welded and polished joints, and commissioning. Canal Engineering also offer on-going annual inspection and maintenance contracts.

For advice regarding the most suitable ASPEN Stainless for you please contact our technical sales team today to discuss your requirements.

ASPEN Drainage Options

- > Available in grade 316 stainless steel (British Standard 316S31, Euronorm 1.4401).
- > A range of Gully Covers (see TD35).
- > Locking Gully Cover.
- > Gully Membrane Flange Disc (see TD66).
- > Gully Cover lifting tools.
- > Variable filtration mesh hole size.
- > Anti Backflow Mushroom Gully Trap (see below).

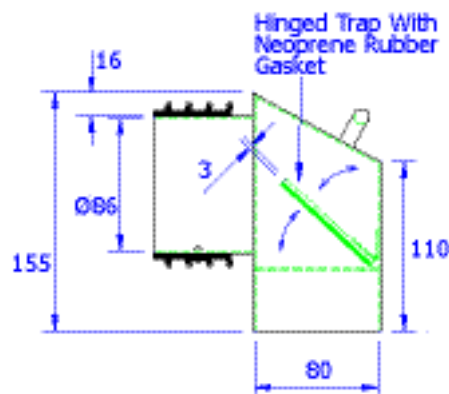

Anti Backflow Mushroom Gully Trap Drawing.