

# ASPEN KD2 Wall Kerb | Internal Single Sided



Stainless

ASPEN Stainless hardworking stainless steel products for hardwearing environments:  
British engineered with a lifetime guarantee.



## Product Description

The standard KD2 Internal Single Sided Wall Kerb support system is designed to support the hygienic wall panel above the finish floor level to reduce the ingress of liquids and offer some protection to factory traffic. It also provides a hygienic interface between floor and wall and is mounted around columns and block walls.


Suitable for use with a Uragard 6-9 mm resin finish.

Size C is custom to each project according to its requirements. The profile of the kerb is dependent on wall thickness.

## Technical Specification

- > 2mm 240 grit stainless steel.
- > Fixing holes for fire rated wall panels.
- > C30 concrete infill.
- > Resin anchor fixings.
- > External galvanised mild steel channel back plate.
- > Available in grade 316 stainless steel (British Standard 316S31, Euronorm 1.4401).
- > British Galvanised Standard BS EN ISO 1461:2009.
- > Compliant with EHEDG guidelines

MODEL	REF	KERB DIMENSIONS			
		A	B	C	D
SINGLE INTERNAL	KD2	9	255 NOMINAL	VARIABLE	35

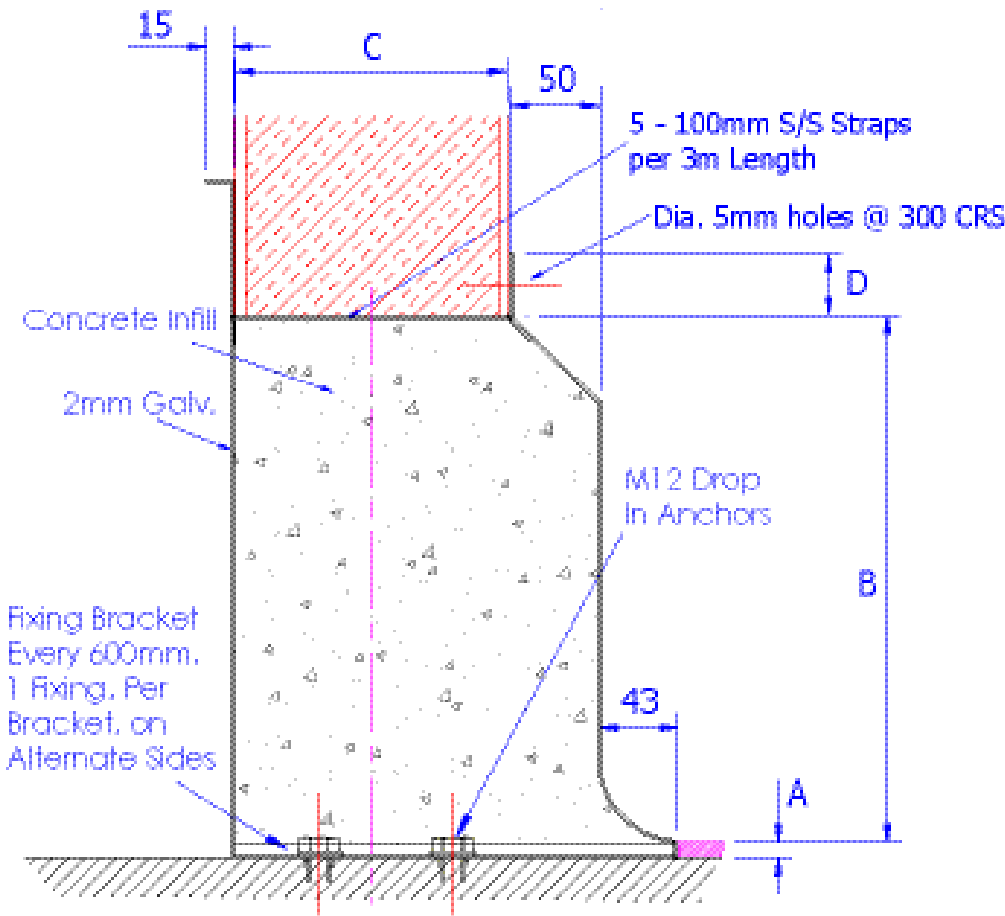

All dimensions in mm.

## ASPEN KD2 Wall Kerb | Internal Single Sided

**ASPEN**

Stainless

ASPEN Stainless hardworking stainless steel products for hardwearing environments: British engineered with a lifetime guarantee.

### ASPEN Kerbing System

As the UK based designer and manufacturer of all ASPEN Stainless, Canal Engineering is able to offer a full range of products to complete your kerbing system and can customize any of its Units or manufacture complete bespoke kerbing systems.

#### Key Benefits

This profile is ideal for installing with a Uragard resin floor. The kerb should be installed on the base slab. The Kerb is fully welded and made to suit sliding, personnel, roller doors, corners, tees and wall ends.

The fixing holes along its length are for fixing the fire rated wall panels.

#### Maintenance

Stainless steel equipment should be occasionally thoroughly checked for retained deposits and concentrated fluid build up that causes corrosion.


#### Cleaning

Many factors affect the choice of cleaning method and frequency of its application. Suitable methods for stainless steel are: water and steam; mechanical non abrasive scrubbing; organic solvents and mild detergents.

### ASPEN Kerbing Installation

Canal Engineering offer supply only or full installation, with fully welded and polished joints, and commissioning. Canal Engineering also offer on-going annual inspection and maintenance contracts.

For advice regarding the most suitable ASPEN Stainless for you please contact our technical sales team today to discuss your requirements.

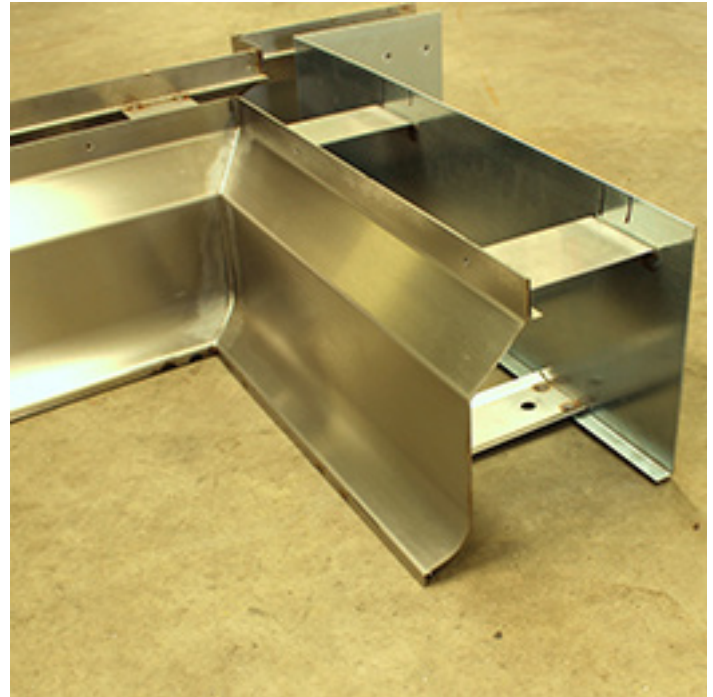

KD2 Kerb Sample

### ASPEN Kerbing Options

- > A range of Uragard resin flooring can be recommended.
- > 2mm stainless steel.
- > Optional 4-1 screed infill.