

ASPEN Stainless hardworking stainless steel products for hardwearing environments: British engineered and sealed with a lifetime guarantee.

Product Description

The standard Folded Tile is set into the floor area to prevent excess wear and provide a resistant floor area.


Suitable for use in hygienic environments.

Available in 2 finishes.

Technical Specification

- 3mm stainless steel plate.
- Available in grade 304 stainless steel (British Standard 304S31, Euronorm 1.4301).

MODEL	BROCHURE REF	DIMENSIONS	
		A	B
SMOOTH FOLDED	TILE300SF	300	25
DURBAR FOLDED	TILE300DF	300	25

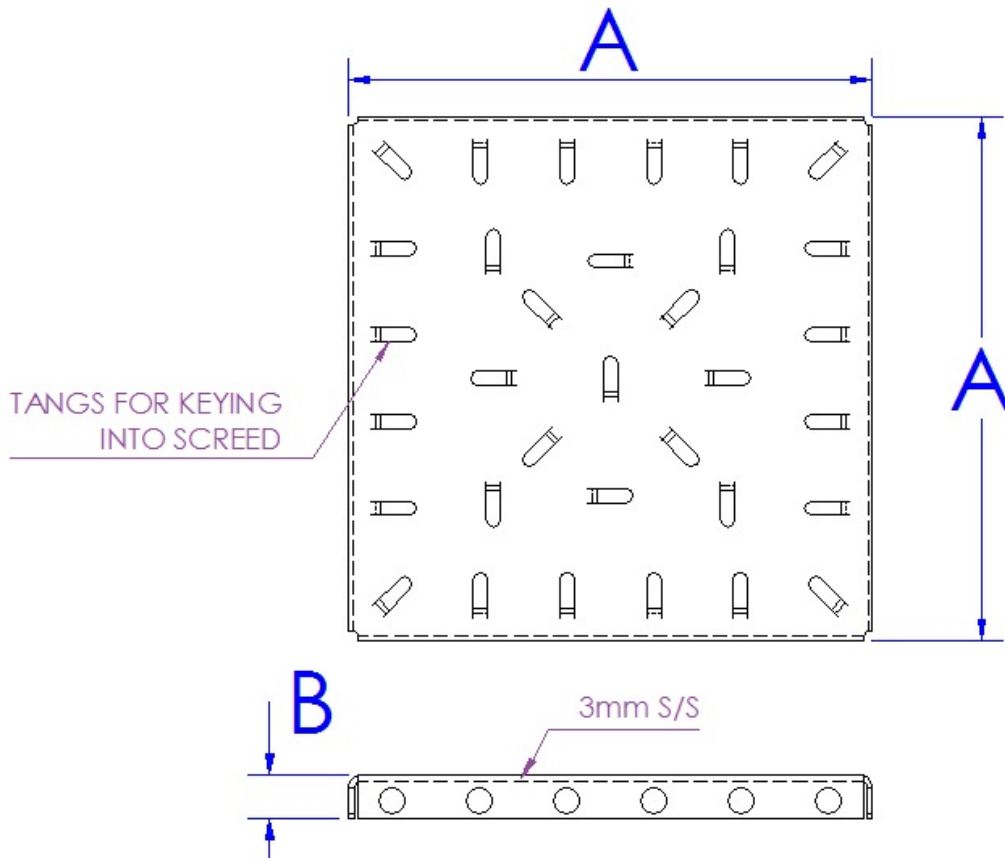

The blue measurements indicate the variable dimensions shown in the chart above. All dimensions in mm.

ASPEN Protection System

As the UK based designer and manufacturer of all ASPEN Stainless, Canal Engineering is able to offer a full range of products to complete your protection system and can customize any of its Units or manufacture complete bespoke protection systems.

- Key Benefits


Provides a hygienic impact resistant surface in those areas of high wear and traffic. Various sizes can be manufactured to suit cuts and odd shapes. This is the stainless steel version of the original Stelcon galvanised tile.

- Maintenance

Stainless steel equipment should be occasionally thoroughly checked for retained deposits and concentrated fluid build up that causes corrosion.

- Cleaning

Many factors affect the choice of cleaning method and frequency of its application. Suitable methods for stainless steel are: water and steam; mechanical non abrasive scrubbing; organic solvents and mild detergents.

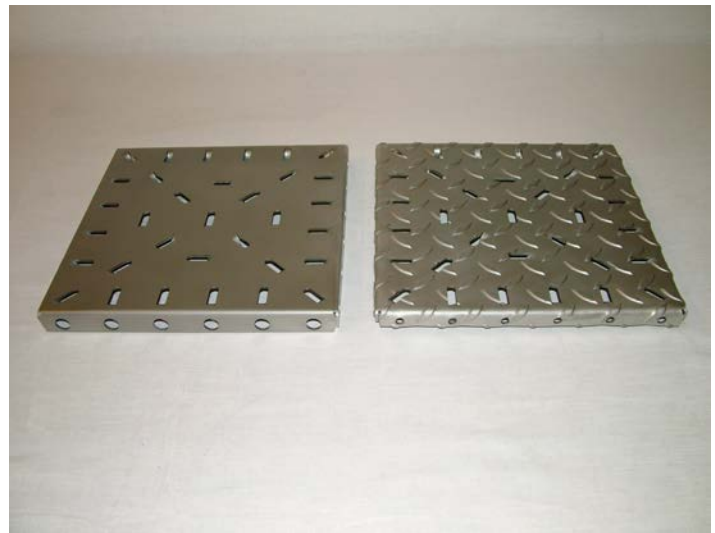

Smooth & Folded Floor Tiles illustration

ASPEN Protection Installation

Canal Engineering offer supply only or full installation, with fully welded and polished joints, and commissioning. Canal Engineering also offer on-going annual inspection and maintenance contracts.

For advice regarding the most suitable ASPEN Stainless for you please contact our specialist engineers today to discuss your requirements; 0115 986 6321; aspen@canalengineering.co.uk

ASPEN Protection Options

- Available in grade 316 stainless steel (British Standard 316S31, Euronorm 1.4401).
- Available with a durbar finish for an anti slip surface.

ASPEN | By Canal Engineering Limited

ASPEN Stainless is a division of Canal Engineering Limited. Canal Engineering is based in Nottingham and specialise in the design, fabrication, manufacture and installation of metalwork engineering projects.

Visit www.canalengineering.co.uk

ASPEN Stainless Steel Resistance Chart



KEY



RECOMMENDED

SUITABLE HOWEVER CONTACT US FOR ADVICE

NOT RECOMMENDED

REAGENT SUBSTRATE	S/S GRADE	
	304	316
ACETIC ACID	Green	Green
ACETONE	Green	Green
ALCOHOL	Green	Green
ALUMINIUM CHLORIDE	Red	Orange
ALUMINIUM SULPHATE	Green	Green
AMMONIA GAS (DRY)	Green	Green
AMMONIUM CHLORIDE	Orange	Orange
AMMONIUM HYDROXIDE	Green	Green
AMMONIUM NITRATE	Green	Green
AMMONIUM PHOSPHATE	Green	Green
AMMONIUM SULPHATE	Red	Orange
AMMONIUM SULPHIDE	Green	Green
AMYL CHLORIDE	Red	Orange
ANILINE	Green	Green
BARIUM CHLORIDE	Red	Red
BARIUM SULPHATE	Green	Green
BEER	Green	Green
BEEF SUGAR LIQUORS	Green	Green
BENZENE	Green	Green
BENZOIC ACID	Green	Green
BORIC ACID	Green	Green
BROMIC ACID	Orange	Orange
BROMINE WATER	Red	Red
BUTANE	Green	Green
CALCIUM CARBONATE	Green	Green
CALCIUM CHLORIDE	Red	Orange
CALCIUM HYDROXIDE	Green	Green
CALCIUM HYPOCHLORITE	Red	Orange
CALCIUM SULPHATE	Green	Green
CARBON BISULPHIDE	Green	Green
CARBON TETRACHLORIDE	Orange	Orange
CAUSTIC POTASH	Green	Green
CAUSTIC SODA	Green	Green
CHLORIDE (DRY)	Orange	Orange
CHLORIDE (WET)	Red	Red
CHLORACETIC ACID	Red	Red
CHLOROBENZENE	Green	Green
CHLOROFORM	Orange	Orange
CHROME ACID 50%	Orange	Orange
CHROME ACID 10%	Green	Green

REAGENT SUBSTRATE	S/S GRADE	
	304	316
CITRIC ACID	Orange	Orange
CITRIC ACID CAN BE USED IN A SIMILAR WAY TO NITRIC ACID FOR PASSIVATION AND CLEANING OF STAINLESS STEEL.		
COPPER CHLORIDE	Red	Red
COPPER CYANIDE	Green	Green
COPPER NITRATE	Green	Green
COPPER SULPHATE	Green	Green
DISTILLED WATER	Green	Green
ETHYL ACETATE	Green	Green
ETHYLENE CHLORIDE	Green	Green
ETHYLENE GLYCOL	Green	Green
FATTY ACIDS	Green	Green
FERRIC SULPHATE	Green	Green
FLUORENE GAS	Red	Red
FORMALDEHYDE	Green	Green
FORMIC ACID	Red	Red
FRUIT JUICES AND PULP	Orange	Orange
GASOLINE	Green	Green
GLYCERINE	Green	Green
HYDROBOMIC ACID 20%	Red	Red
HYDROCHLORIC ACID 40%	Red	Red
HYDROCYANIC ACID	Green	Green
HYDROGEN PEROXIDE	Green	Green
IODINE	Red	Orange
KEROSENE	Green	Green
LACTIC ACID	Green	Green
LINSEED OIL	Green	Green
MAGNESIUM CHLORIDE	Orange	Orange
MAGNESIUM SULPHATE	Green	Green
MALEIC ACID	Green	Green
METHYL CHLORIDE	Green	Green
MILK	Green	Green
MURIATIC ACID	Red	Red
NICKEL CHLORIDE	Orange	Orange
NICKEL SULPHATE	Green	Green
OIL AND FATS	Green	Green
OLEIC ACID	Green	Green
OXALIC ACID	Orange	Orange
PERCHLORIC ACID	Red	Red
PETROLEUM OILS	Green	Green
PHENOL 5%	Green	Green
PHOSPHORUS TRICHLORIDE	Green	Green

REAGENT SUBSTRATE	S/S GRADE	
	304	316
PHOTOGRAPHIC SOLUTIONS	Orange	Green
PITRIC ACID	Green	Green
POTASSIUM CARBONATE	Green	Green
POTASSIUM CHLORIDE	Green	Green
POTASSIUM CYANIDE	Green	Green
POTASSIUM DICHROMATE	Green	Green
POTASSIUM HYDROXIDE	Green	Green
POTASSIUM PERMANGANATE	Green	Green
POTASSIUM SULPHATE	Green	Green
SEA WATER	Red	Orange
SEWERAGE	Orange	Orange
SILVER NITRATE	Green	Green
SILVER SULPHATE	Green	Green
SODIUM BICARBONATE	Green	Green
SODIUM BISULPHITE	Green	Green
SODIUM CARBONATE	Green	Green
SODIUM HYDROXIDE	Green	Green
SODIUM HYPOCHLORITE	Orange	Orange
SODIUM SULPHATE	Green	Green
SODIUM SULPHIDE	Orange	Orange
SODIUM SULPHITE	Green	Green
SODIUM THIOSULPHATE	Green	Green
STANNOUS CHLORIDE	Red	Orange
STEARIC ACID	Green	Green
SULPHUROUS ACID	Red	Orange
SULPHUR	Orange	Orange
SULPHUR DIOXIDE (DRY/WET)	Orange	Green
SULPHURIC ACID	Red	Red
TANNIC ACID	Green	Green
TANNING LIQUORS	Green	Green
TRICHLOROETHYLENE	Green	Green
TURPENTINE	Green	Green
UREA	Green	Green
URINE	Green	Green
VINEGAR	Green	Green
WATER (FRESH/MINE/SALT)	Green	Green
WHISKY	Green	Green
WINES	Green	Green
ZINC CHLORIDE	Red	Red
ZINC SULPHATE	Orange	Green

ASPEN Stainless

For advice regarding the most suitable ASPEN Stainless for you please contact our specialist engineers today to discuss your requirements; 0115 986 6321; aspen@canalengineering.co.uk

